


# Service and Maintenance

From experience, if your rainwater harvesting system has not been installed by a competent supplier of the equipment, then we highly recommend a Service and Maintenance plan is conducted.

A system may appear to be running smoothly when in fact it is not running efficiently and as such, components may fail prematurely incurring unwanted expenses.

## Our plan includes :-

- test the system for leaks
- test the mains water top up operation
- check all key components are present
- re-calibrate and clean the low level sensor in the tank
- test and clean all moving parts
- test all appliances connected to the system
- clean the in-tank filters
- ensure all tank lids are secure and child proof
- apply rainwater labels if not present
- ensure the system is fully operational

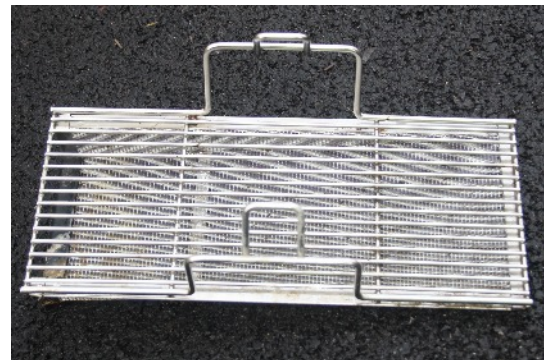

Cleaning the in-tank filter



Testing the mains water top up